



KMix XMOS Programming:

- Connect two headers of 0909 board with Power jumper cable.

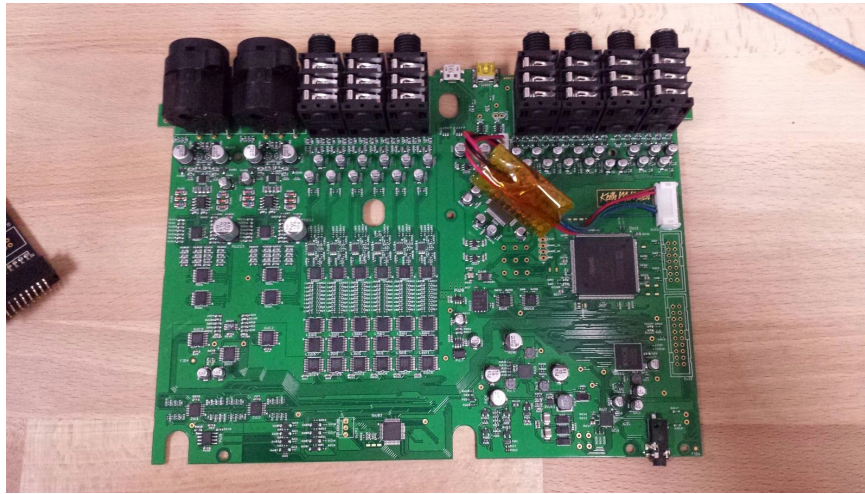


- Connect 0909 Board to computer with Micro-USB cable. Board should power on.

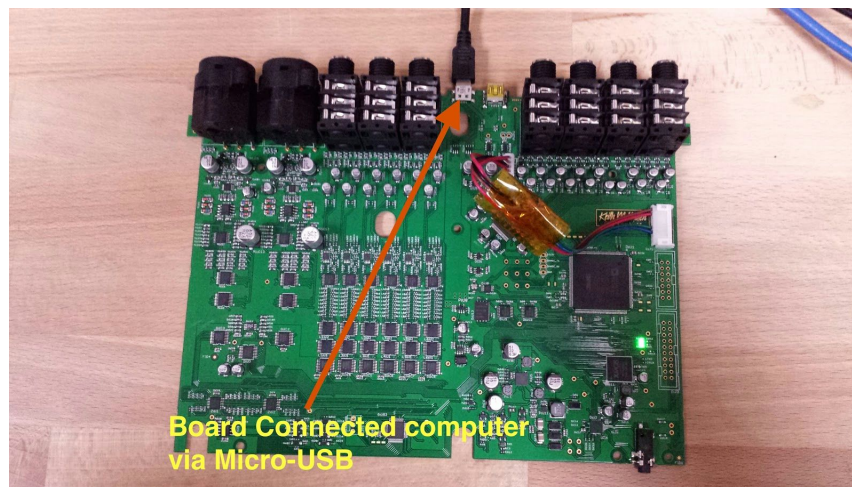

- Connect XMOs programmer to computer with provided USB cable.




- Align XMOs programmer pins with board.

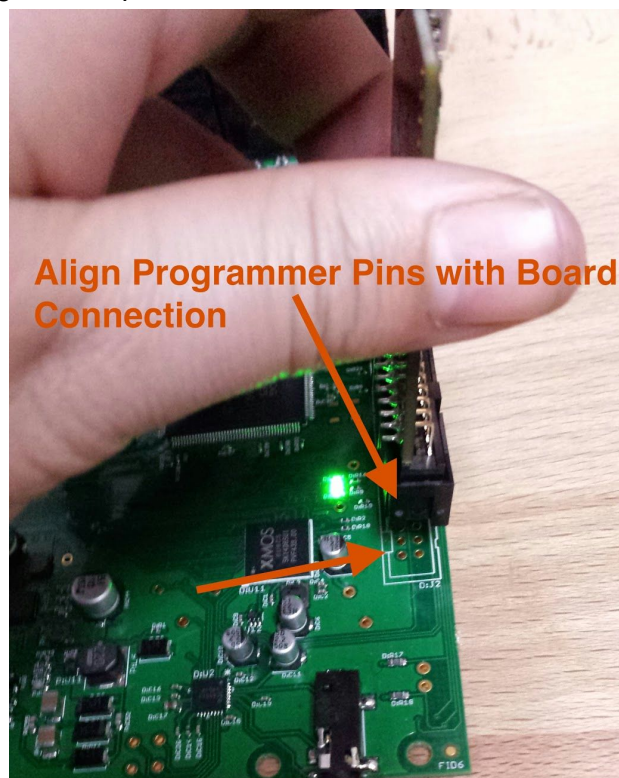


- Programmer faces out (to Right) during programming.




- Hold Programmer at angle during programming. Maintain pressure to hold programmer at angle until programming is complete.

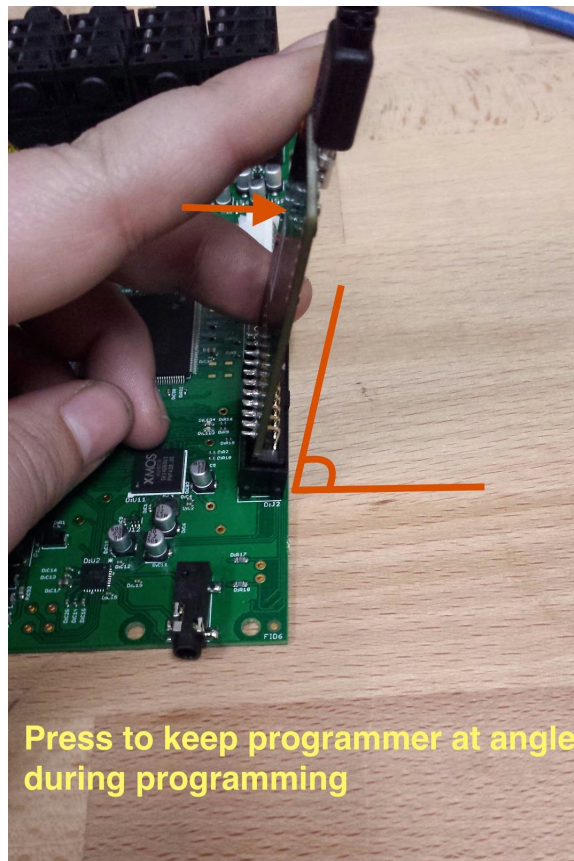

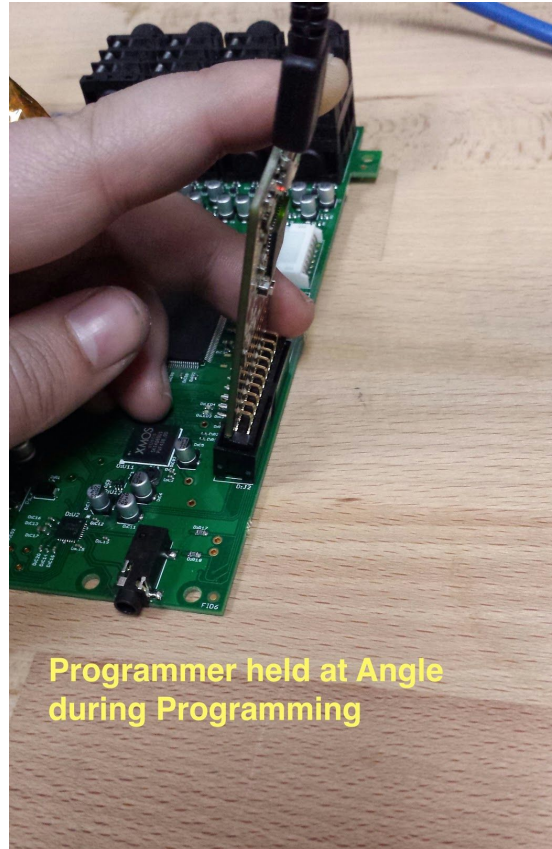


Programmer held at Angle during Programming


- Double click Kmix_hw2_B1001.command alias file to open.

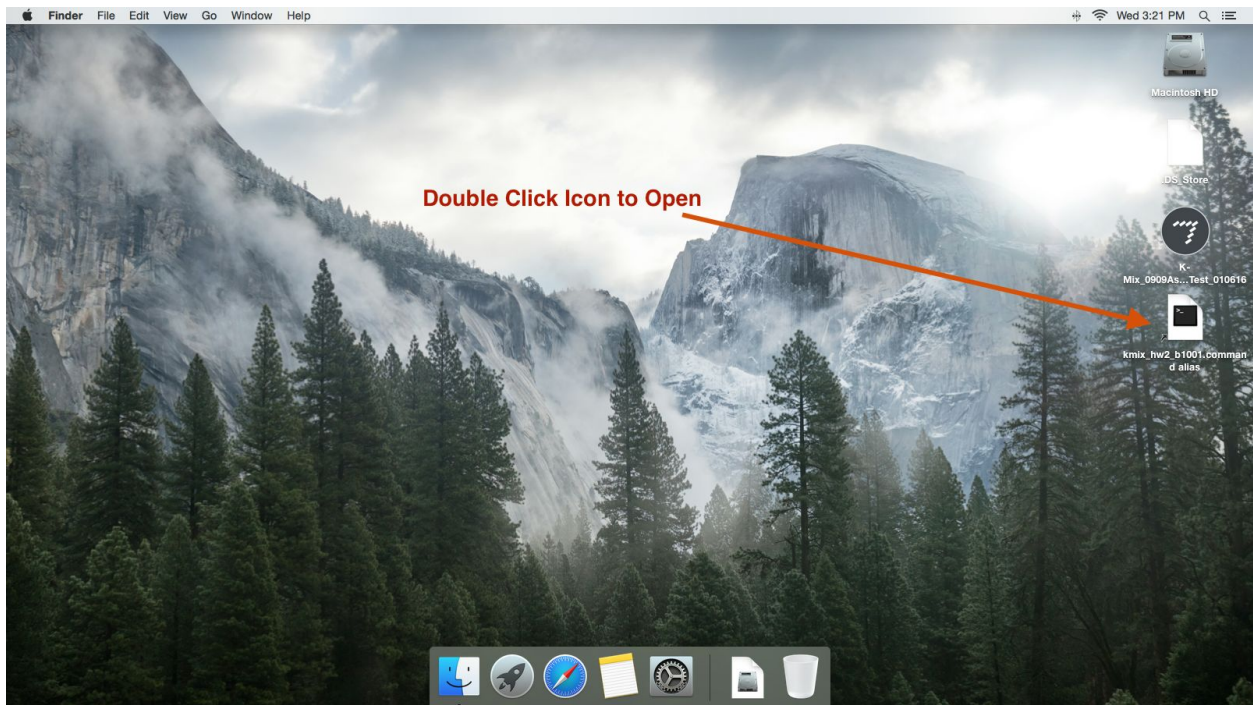

- Terminal should begin running first step, “Erasing Flash”, followed by “Factory boot image added.”

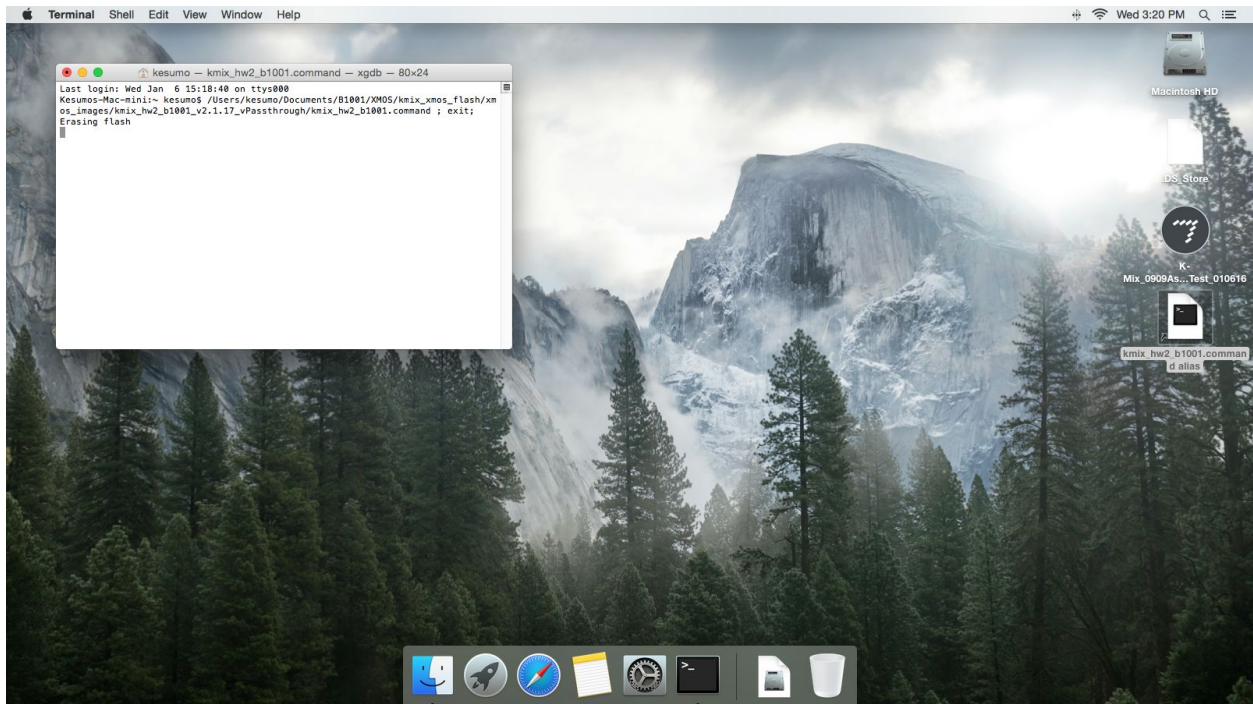

- Once countdown is complete, you should see “Finished”, “0”, “logout”, followed by “[Process completed]”.

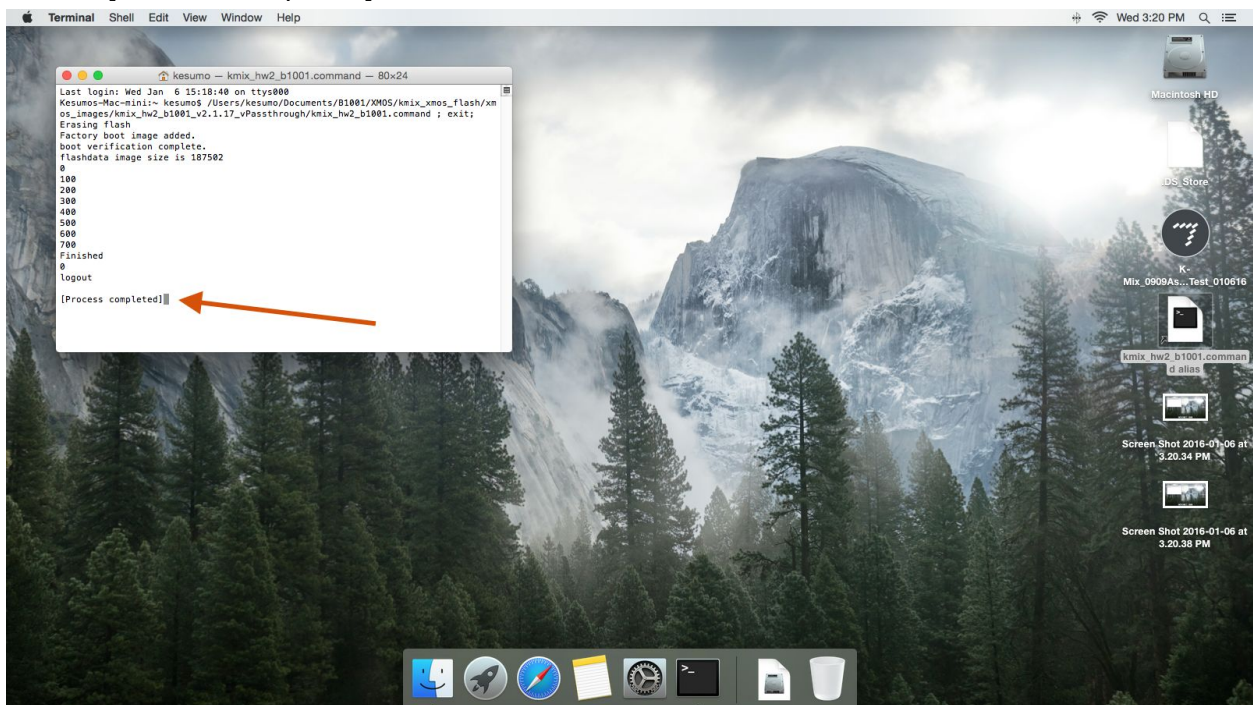

- Repeat steps above for each unit.
- If programmer is not well connected, you will receive an error message and process will stop. Reconnect XMOs programmer and retry openingKmix_hw2_B1001.command alias file. Check connection of XMOs programmer.

